



## Product Description

- Two side coated board made from 100 % virgin fibres
- Unbeatable conversion results – can be folded, creased, varnished, film laminated, hot foil stamped and embossed with ease
- Available as FSC certified

## Applications

- Luxury packaging & graphical print with advanced structures and surface designs


## Printing

- Recommended for offset, screen and large format digital printing
- Available in sheet size up to 1700x3600 mm

## Conversion

- Albus is recommended for applications involving: embossing, film and foil lamination, die cutting, varnishing, creasing, perforating, cutting and scoring

## Characteristics

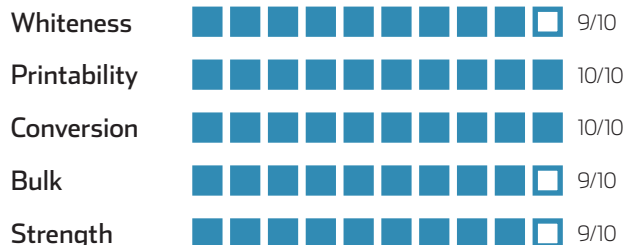

## Specification

Grammage	Thickness	Taber Stiffness		Smoothness	CIE Whiteness	Brightness
		MD mNm	CD mNm			
g/m <sup>2</sup>	micron	MD mNm	CD mNm	PPS, um ISO 8791-4	D65/10o	ISO Brightness C/2°, %
450	570	47,5	24,5	1.0	112	95
480	630	58	31,4	1.0	112	95
520	690	77,1	35,9	1.0	112	95
550	760	95	44,8	1.0	112	95
590	840	107,8	59,5	1.0	112	95
640	930	-----	-----	1.0	112	95
690	1020	-----	-----	1.0	112	95
Tolerance						
+/-5%	+/-5%	theoretical		Max 1.5	Min 107	Min 90